

BUCAM350

Universal License Plate Style Camera


What's in the box

1. Product Sheet
2. BUCAM350 License plate style camera
3. Power Cable w/ Fuse, Video Cable



Mounting the camera

Position on the license plate top screws for the best viewing angle. This should not be directly next to or under a reverse/backup/license lamp as it may blind the camera at night. Before drilling, determine the best way to run the power wires to the reverse lights and the extension cable through the car. Insure that the route will not interfere with any safety equipment, trunk release or other items in the vehicle. Look for wires, sensors, double metal, anything that could cause a problem or damage. The camera should lay flat against the mounting surface for proper installation.

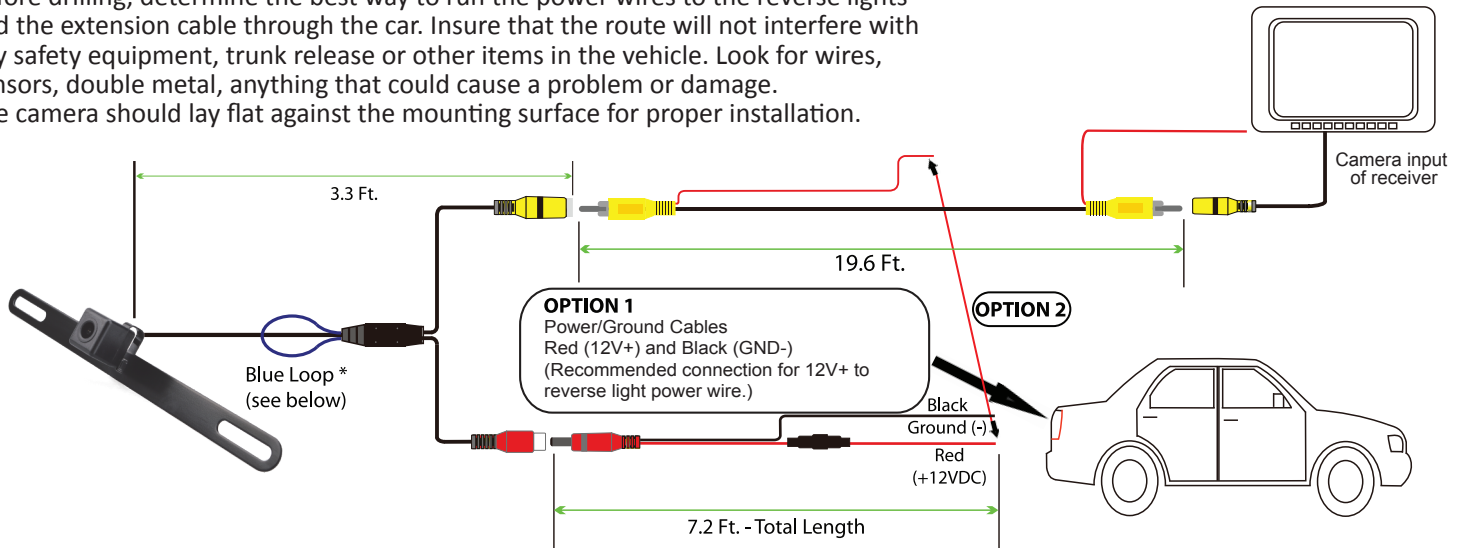

1. Fix the camera to the appropriate position on the license plate and adjust the angle.
2. Follow ONE of the following wiring options.

OPTION 1: Connect camera power wire to the vehicle's reverse lamp:


- a) Locate the reverse lamp in the tail light assembly.
- b) Attach the red wire to the positive 12 volt wire from the reverse lamp. Use a crimp connector or soldering tool to ensure connection is secure. Once this connection is complete, note that the red power wire that is located on either end of the video RCA cable will not be needed. The bare wire at the end of each wire lead should be capped or taped off to prevent potential power interruption.
- c) Attach the black wire to ground(-).
- d) Run video cable to the location of the receiver or monitor (not included). Connect one yellow RCA end of the video cable to the camera and connect the other end of the yellow RCA cable to the video source (receiver/monitor).

OPTION 2: Connect camera power wire to receiver/monitor power:

- a) From camera location, connect red power wire from power cable to red power wire from one end of the video cable. Use a crimp connector or soldering tool to ensure connection is secure.
- b) Attach the black wire to ground.
- c) Run video cable to the location of the receiver or monitor (not included). Connect one yellow RCA end of the video cable to the camera and connect the other end of the yellow RCA cable to the video source (receiver/monitor).
- d) From video source (receiver/monitor) location, connect red power wire from end of the video cable to the reverse wire lead located on the video source (receiver/monitor).

Camera Specifications

Image Sensor: CMOS, OV 7955
Power: 12V DC, Negative Ground
Power Consumption: < 1 Watt
Effective Pixels: 672H x 492V
Video Format: NTSC
Lux: < 0.5
White Balance: Auto
Viewing Angle: 170 Degrees
IP Rating: IP67
Operating Temperature: -30 C ~ +70 C
Plate material: Stainless Steel SUS304
Camera Body: Plastic

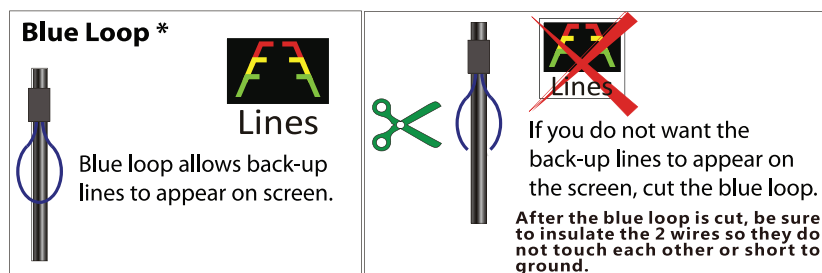

Limited Two Year* Warranty

This warranty gives you specific legal rights. You may also have other rights which vary from state to state.

Jensen warrants this product to the original purchaser to be free from defects in material and workmanship for a period of two years from the date of the original purchase.

Jensen agrees, at our option, during the warranty period, to repair any defect in material or workmanship or to furnish an equal new, renewed, or comparable product (whichever is deemed necessary) in exchange without charges, subject to verification of the defect or malfunction and proof of the date of purchase. Subsequent replacement products are warranted for the balance of the original warranty period.

What is covered? This warranty covers all defects in the material and workmanship in this product. The following are not covered: software, installation/removal costs, damage resulting from accident, misuse, abuse, neglect, product modification, improper installation, incorrect line voltage, unauthorized repair, or failure to follow instructions supplied with the product, or damage occurring during return shipment of the product. Specific license conditions and copyright notices for the software can be found via www.jensenmobile.com.

Warranty Coverage

* Limited 2-year warranty. (Proof of purchase required)

- Extended Coverage: Extend your warranty from 2 years to 4 years when you register online at www.jensenmobile.com. Registration must be completed within 60 days of the original purchase date to qualify for this extension.

What to do?

1. Before you call for service, check the troubleshooting guide in your owner's manual. A slight adjustment of any custom controls may save you a service call.
2. If you require service during the warranty period, you must carefully pack the product (preferably in the original package) and ship it by prepaid transportation with a copy of the original receipt from the retailer to an authorized service center.
3. Please describe your problem in writing and include your name, a return UPS shipping address (P.O. Box not acceptable), and a daytime phone number with your shipment.
4. For more information and for the location of the nearest authorized service center please contact us by one of the following methods:
 - a. Call us toll-free at (888) 921-4088 (Monday-Friday, 9:00 am, to 5:00 pm, EST)
 - b. E-mail us at cs@jensenmobile.com

Exclusion of Certain Damages: This warranty is exclusive and in lieu of any and all other warranties, expressed or implied, including without limitation the implied warranties of merchantability and fitness for a particular purpose and any obligation, liability, right, claim or remedy in contract or tort, whether or not arising from the company's negligence, actual or imputed. No person or representative is authorized to assume for the company any other liability in connection with the sale of this product. In no event shall the company be liable for indirect, incidental, or consequential damages.